




SAND DOLLAR

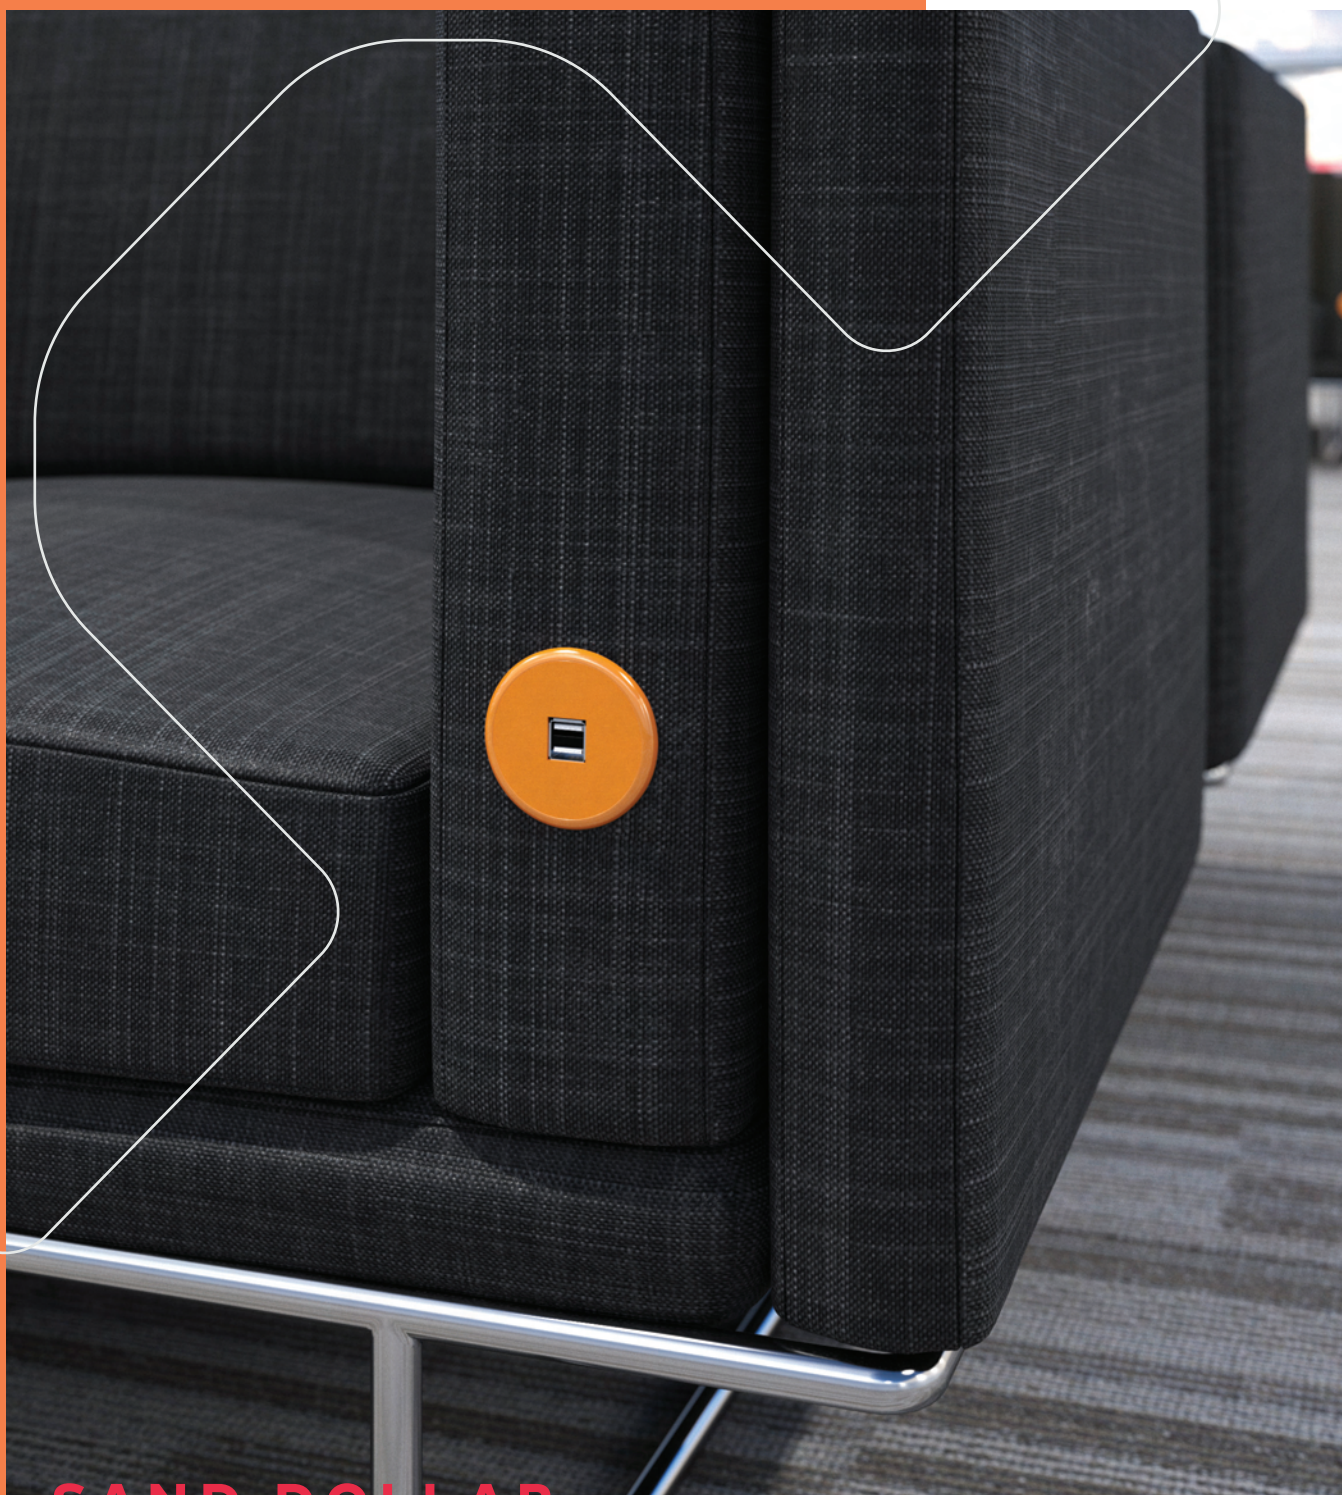

LOW PROFILE POWER.

2" & 3" GROMMET-STYLE POWER

As the name implies, Sand Dollar is a low-profile way to connect people to their technology. Power and charging is available by way of 15 Amp receptacles and 2.1A USB ports. Available in eight colors, Sand Dollar can be retrofitted into any standard two or three-inch grommet opening for power without limitations.



SAND DOLLAR PROVIDES:

Furniture Integrations

Seamlessly blends power and USB charging ports across a variety of furniture lines in both new and retrofit applications.

Tamper Resistant Receptacles

Spring-loaded shutter mechanism keeps foreign objects out; adding an additional level of safety in high traffic or lounge areas more prone to spills.

Enhanced USB Charging Technology

Upgraded 2.1A USB ports charge your devices quickly, allowing you to stay connected anywhere, anytime.

Quick-Lock Mounting Mechanism

Allows for easy and secure installation that can be completed by cutting a 2" or 3" hole into the desired surface and securing the Sand Dollar from below; accommodating a range of thick and thin surfaces from .25 inches - 2 inches.

Convenient and Functional Outlets

The Sand Dollar can be mounted virtually anywhere. It's perfect for work surfaces, chairs, or accent tables and allows ample access to plug mobile devices like laptops, cell phones, and tablets.

ETL Listed for US and Canada



FEATURES:

Applications

Bezel / In-surface

Standard Finishes

Gray	
Black	
Gloss White	
Light Blue	
Light Green	
Pure Orange	
Signal Red	
Sulfur Yellow	




Specifications


- 1-2 - 15A, 120VAC Tamper Resistant Receptacles
- 2.1A/10.5W USB Charging Ports
- 2" and 3" Models Offered
- 72" Standard Cord with NEMA 5-15 Straight Plug
- Recommended Table Thickness: 0.25" - 2"
- Recommended Table Cut Out: 80mm for 3" Unit and 60 mm for 2" Unit
- Fastening Ring Included Secures Unit to Surface
- ETL Listed for US and Canada

Dimensions

- 3" Sand Dollar Dimensions: 3.36" x 3.21"
- 2" Standard Sand Dollar Dimensions (USB & Power Only): 2.62" x 3.51"

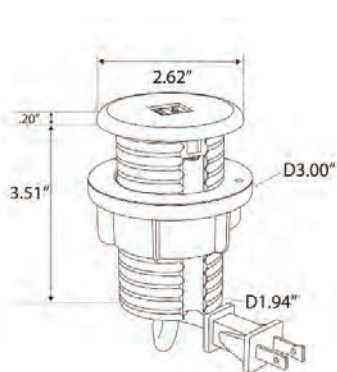

2" Sand Dollar with
2 USB Shown

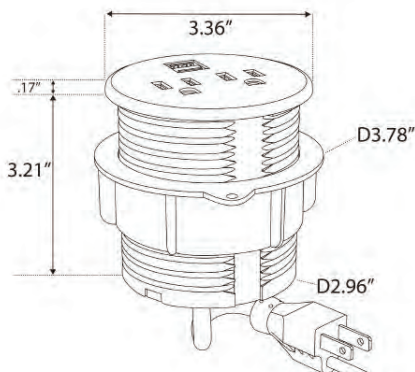

3" Sand Dollar with
2 Power 2 USB Shown

SAND DOLLAR

DESCRIPTION

FINISH

PART NUMBER


Sand Dollar Configurations

• 1 Power with 72" cord, 2" Unit	Black White Gray Light Blue Light Green Sulfur Yellow Pure Orange Signal Red	SAN-2-1-B-72 SAN-2-1-W-72 SAN-2-1-GY-72 SAN-2-1-LB-72 SAN-2-1-LG-72 SAN-2-1-SY-72 SAN-2-1-PO-72 SAN-2-1-SR-72
• 2 USB with 72" cord, 2" Unit	Black White Gray Light Blue Light Green Sulfur Yellow Pure Orange Signal Red	SAN-2-U-B-72 SAN-2-U-W-72 SAN-2-U-GY-72 SAN-2-U-LB-72 SAN-2-U-LG-72 SAN-2-U-SY-72 SAN-2-U-PO-72 SAN-2-U-SR-72
• 2 Power & 2 USB with 72" cord, 3" Unit	Black White Gray Light Blue Light Green Sulfur Yellow Pure Orange Signal Red	SAN-3-2U-B-72 SAN-3-2U-W-72 SAN-3-2U-GY-72 SAN-3-2U-LB-72 SAN-3-2U-LG-72 SAN-3-2U-SY-72 SAN-3-2U-PO-72 SAN-3-2U-SR-72

SAND DOLLAR INSTALLATION

(2.00"/60mm)

Components & Hardware



(A) SAN-2

Tools Needed



For use with: This product fits tables .25" – 2.00" thick.
Fits standard 2.00" (60mm) grommet hole.

Installation Instructions:

- 1-** Determine the Sand Dollar (A) mounting location and prepare the surface by cutting the mounting hole.
- 2-** Remove Mounting Ring and Fiber Washer from Sand Dollar by unscrewing them as shown in FIG 1. Retain for later use.
- 3-** Insert the Sand Dollar through the cutout from above and position as desired. Align grooves in Sand Dollar with notch in mounting ring, as shown in FIG 2, and slide Mounting Ring upward until it comes in contact with underside of table. Rotate Mounting Ring clockwise, ensuring notch engages with uppermost thread, and tighten until Sand Dollar is secure in hole. NOTE: If Mounting Ring disengages from threads before Sand Dollar is fully secure, remove and install Fiber Washer, as shown in FIG 1, and repeat step 3.
- 4-** Run the Sand Dollar power cord to a power outlet as needed.
- 5-** Optional – To ensure Mounting Ring doesn't loosen during use a screw may be inserted into Locking Hole to secure it to the underside of the work surface.

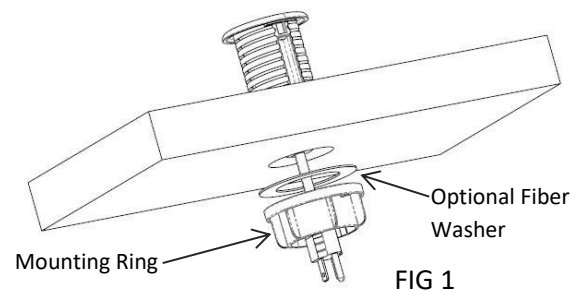


FIG 1

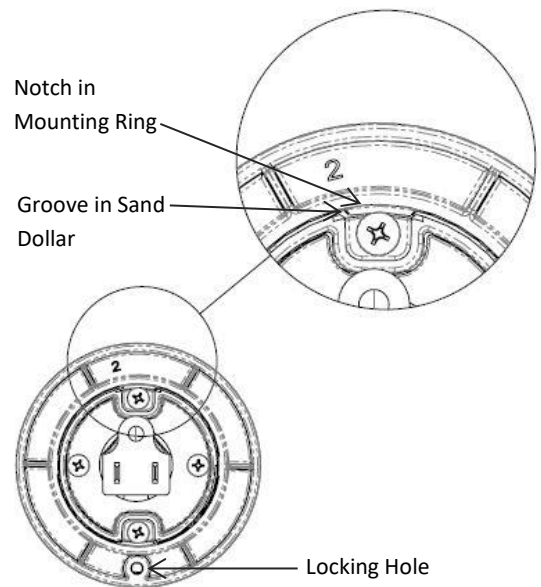


FIG 2

NOTE: A furniture Power Distribution Unit is not for permanent installation as part of the building structure and not for mounting in permanently-installed furnishing such as a fixed countertop.

SAND DOLLAR INSTALLATION

(3.00"/80mm)

Components & Hardware



Tools Needed



&



For use with: This product fits tables .25" – 2.00" thick.
Fits standard 3.00" (80.00mm) grommet hole.

Installation Instructions:

- 1-** Determine the Sand Dollar (A) mounting location and prepare the surface by cutting the mounting hole.
- 2-** Remove Mounting Ring and Fiber Washer from Sand Dollar by unscrewing them as shown in FIG 1. Retain for later use.
- 3-** Insert the Sand Dollar through the cutout from above and position as desired. Align grooves in Sand Dollar with notch in mounting ring, as shown in FIG 2, and slide Mounting Ring upward until it comes in contact with underside of table. Rotate Mounting Ring clockwise, ensuring notch engages with uppermost thread, and tighten until Sand Dollar is secure in hole.
NOTE: If Mounting Ring disengages from threads before Sand Dollar is fully secure, remove and install Fiber Washer, as shown in FIG 1, and repeat step 3.
- 4-** Run the Sand Dollar power cord to a power outlet as needed.
- 5-** Optional – To ensure Mounting Ring doesn't loosen during use a screw may be inserted into Locking Hole to secure it to the underside of the work surface.

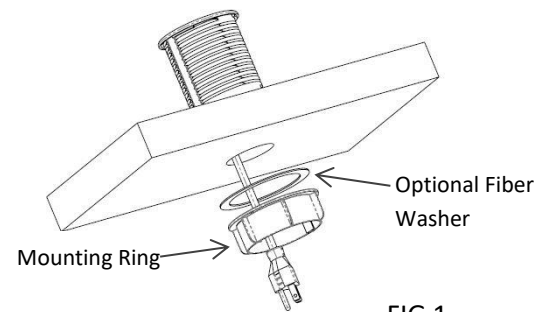


FIG 1

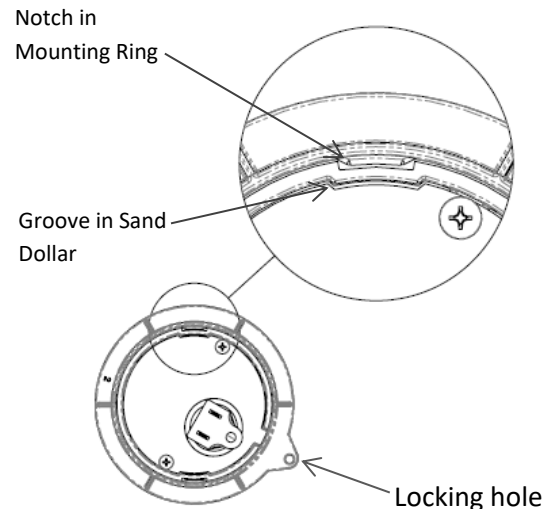


FIG 2

NOTE: A furniture Power Distribution Unit is not for permanent installation as part of the building structure and not for mounting in permanently-installed furnishing such as a fixed countertop.